

04-27-00

PTO/SB/05 (2-98)

A

Please type a plus sign (+) inside this box →



Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

EN-3093-US

First Named Inventor or Application Identifier

Patrick C. Tetzlaff et al.

Title

EXHAUST DIAPHRAGM ASSEMBLY

Express Mail Label No.

EL048587829US

Only for new nonprovisional applications under 37 CFR 1.53(b))

PTO
09/559867
04/26/00

04/26/00

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification [Total Pages **17**]

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

☒ Drawing(s) (35 USC 113) [Total Sheets **3**]

4. Oath or Declaration [Total Pages **2**]

a. ☒ Newly executed (original or copy)

b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named
in the prior application, see 37 CFR 1.63(d)(2) and
1.33(b)

☐ Incorporation by Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4b, is considered as being part
of the disclosure of the accompanying application and is hereby
incorporated by reference therein

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(If applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
(PTO/SB/09-12) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(If foreign priority is claimed)

16. ☒ Other. Certificate of Mailing by Express Mail (1 pg)

*NOTE FOR ITEMS 1 & 14 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation
Prior application information

☐ Divisional
Examiner

☐ Continuation-in-part (CIP)
Group/Art Unit

of prior application No

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or

☒

Correspondence address below

NAME John S. Beulick

Armstrong Teasdale LLP

ADDRESS One Metropolitan Square

Suite 2600

CITY St. Louis

STATE

MO

ZIP CODE

63102-2740

COUNTRY USA

TELEPHONE

(314) 621-5070

FAX

(314) 621-5065

Name (Print/type)

John S. Beulick

Registration No. (Attorney/Agent)

33,338

Signature

John S. Beulick

Date

April 26, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Office, Patent and trademark Office, Washington, DC 20231 DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

04-27-00

A

jc808 U.S. PTO
04/26/00

PATENT
EN-3093-US

jc525 U.S. PTO
09/559867
04/26/00

CERTIFICATE OF MAILING BY EXPRESS MAIL TO
THE COMMISSIONER OF PATENTS AND TRADEMARKS


Express Mail mailing label number: EL048587829US

Date of Mailing: April 26, 2000

I certify that the attached utility patent application of **PATRICK C. TETZLAFF, JAMES E. MACIER, and JONATHAN J. SERVAIS** for **EXHAUST DIAPHRAGM ASSEMBLY**, including:

- Eight (8) pages of specification; Eight (8) pages of claims; one (1) page of abstract
- Declaration and Power of Attorney (2 pgs)
- Three (3) sheets of drawings
- Patent Application Transmittal (1 page)
- Fee Transmittal (in duplicate) (1 page)
- Certificate of Mailing Via Express Mail (1 page)
- Return post card

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above in an envelope addressed to the Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, D.C. 20231.


John S. Beulick, Reg. No. 33,338
Armstrong Teasdale LLP
One Metropolitan Square, Suite 2600
St. Louis, MO 63102
314/621-5070

09599367 042600

EXHAUST DIAPHRAGM ASSEMBLY

BACKGROUND OF THE INVENTION

This invention relates generally to marine engines and, more specifically, to detecting engine exhaust gas pressure in a fuel injected or direct fuel injected engine.

Marine engines typically include a power head, an exhaust housing, and a lower unit. A drive shaft extends from the power head, through the exhaust housing, and into the lower unit. The lower unit includes a gear case, which supports a propeller shaft. One end of the propeller shaft is engaged to the drive shaft, and a propeller is engaged to an opposing end of the shaft.

In order to maintain optimum combustion, as airflow to the cylinders increases, fuel flow to the cylinders also should increase. As airflow to the cylinders decreases, fuel flow to the cylinders also should decrease.

Many variables impact airflow to the cylinders including conditions at the propeller. For example, the depth at which an engine propeller is located in the water impacts air flow through the engine, including an amount of fresh air supplied to the engine cylinders. Fuel flow to the cylinders also is adjusted based on operating parameters such as atmospheric pressure and intake air temperature. An absolute pressure sensor typically is utilized for generating a signal representative of atmospheric pressure, and a temperature sensor typically is located at the engine air intake to generate a signal representative of intake air temperature. The sensors are coupled to, or part of, an electronic control unit (ECU), which samples the signals generated by the sensors and adjusts fuel flow according to the sampled signals.

An additional parameter that has a significant impact on fresh airflow to the engine cylinders is exhaust flow. Specifically, a key parameter governing the exhaust gas flow is the gas pressure within the exhaust system. Known commercial marine engines, however, do not utilize exhaust gas pressure data in controlling the fuel / air ratio in the engine cylinders.

More specifically, and until now, the difficulties and costs associated with measuring such exhaust gas pressure for controlling the fuel / air ratio during engine operations were prohibitive in commercial marine engines. For example, the

carbon and soot resulting from the combustion process can collect and block the sensor, preventing it from reading pressure. In addition, exhaust gas from an internal combustion engine contains known corrosive compounds which can damage electrical components.

5

BRIEF SUMMARY OF THE INVENTION

The present invention, in one aspect, includes a diaphragm assembly for being connected between an engine exhaust path and an engine control unit to transmit exhaust gas pressure from the exhaust path to the engine control unit. In an exemplary embodiment, the diaphragm assembly includes a diaphragm housing and a diaphragm positioned in the housing and separating a first chamber and a second chamber. The first chamber is configured to be in flow communication with the exhaust path and the second chamber is configured to be in flow communication with the engine control unit.

The diaphragm housing, in the exemplary embodiment, includes a first housing member and a second housing member. An inner surface of the first housing member also is a side wall of the first chamber, and the inner surface has a conical shape to facilitate drainage of water from the first chamber. Also, the first chamber has a first volume and said second chamber has a second volume. The first volume is greater than the second volume.

The diaphragm includes an o-ring and a diaphragm member integral with the o-ring. In the exemplary embodiment, the o-ring and said diaphragm member are fabricated from fluorosilicone. The first and second housing members each include an o-ring groove so that when the housing members are assembled, the diaphragm o-ring is trapped between the first and second housing members in the grooves.

Prior to operation of the engine, the diaphragm assembly is coupled to the engine so that the first chamber is in flow communication with the engine exhaust path and the second chamber is in flow communication with the engine control unit. In one embodiment, a first tube extends from an opening in the engine power head to an inlet to the first chamber, and a second tube extends from an outlet of the second chamber to a port of the control unit.

During engine operation, exhaust gas pressure is communicated to the diaphragm via the first tube. An increase in the exhaust gas pressure causes the diaphragm to compress the air in the second chamber and in the second tube. As a result, the pressure change is transmitted through the second chamber, the second tube, and to the engine control unit. The engine control unit can use such exhaust gas pressure data to control engine operations, such as to control the fuel / air ratio in the engine cylinders.

The above described diaphragm facilitates communication of engine exhaust gas pressure information to an engine control unit and protects the control unit from direct exposure to the exhaust gas.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side view of an outboard engine.

Figure 2 is a schematic illustration of a probe and diaphragm assembly coupled to engine ECU.

Figure 3 is a partial cross-sectional view of a probe installed in an engine.

Figure 4 is a cross-sectional view of the probe shown in Figure 3 along Line 4-4.

Figure 5 is an exploded view of the probe shown in Figure 4.

Figure 6 is a right side view of a diaphragm.

Figure 7 is a left side view of a diaphragm.

Figure 8 is a cross-sectional view of the diaphragm shown in Figure 7 along Line 7-7.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is described herein in the context of an outboard engine. The present invention could, however, be utilized in connection with a stern drive engine as well as with an outboard engine. Further, the present invention is not limited to practice with any one particular engine, and therefore, the following description of an exemplary engine relates to only one exemplary implementation of the present invention.

Referring more particularly to the drawings, Figure 1 is a perspective view of an outboard engine 10, such as an outboard engine commercially available from Outboard Marine Corporation, Waukegan, Illinois. Engine 10 includes a cover 12 which houses a power head 14, an exhaust housing 16, and a lower unit 18. A drive shaft 20 extends from power head 14, through exhaust housing 16, and into lower unit 18.

Lower unit 18 includes a gear case 22 which supports a propeller shaft 24. One end of propeller shaft 24 is engaged to drive shaft 20, and a propeller 26 is engaged to an opposing end of shaft 24. Propeller 26 includes an outer hub 28 through which exhaust gas is discharged. Gear case 22 includes a bullet, or torpedo, 30 and a skeg 32 which depends vertically downwardly from torpedo 30.

Power head 14 includes an internal combustion engine having an exhaust system with an exhaust outlet. Power head 14 also includes an adapter 34. A port 36 is located in adapter and typically is used for emission testing of engine 10. A main exhaust gas duct extends through adapter 34 and exhaust housing 16 and into lower unit 18 so that exhaust flows from power head 14 through the gas duct and out hub 28.

Figure 2 is a schematic illustration of a probe and diaphragm assembly 50, sometimes referred to herein as an exhaust pressure sensing system, coupled to an engine ECU 52. System 50 includes a probe 54 coupled to a diaphragm assembly 56 by a first tube 58. Diaphragm assembly 56 is coupled to ECU 52 at an ECU port 60 by a second tube 62. Generally, and with respect to engine 10 shown in Figure 1, system 50 is located under cover 12 with probe 54 located within opening 36.

Alternatively, and rather than probe 54, diaphragm assembly 56 can be directly connected to the engine by one tube (e.g., tube 58) of sufficient length. In an

exemplary embodiment, tube 58 could be provided with a threaded member at the end to be secured to the power head. Of course, alternative connectors could be used to secure tube 58 to the engine. The probe therefore is not necessarily required for use with each type of engine, and assembly 56 can be utilized with and without a probe.

Figure 3 is a partial cross-sectional view of probe 54 installed in opening 36 of engine 10. A power head case 100 of engine 10 at opening 36 includes a water jacket 102 to cool case 100. Opening 36 is defined by a threaded wall 104. An exhaust duct, or path, 106 is formed by case 100, and path 106 extends from power head 14, through exhaust housing 16, and lower unit 18 (Figure 1).

Probe 54 includes an elongate probe body 110, and an engine engagement assembly 112 secured to probe body 110 and configured to engage to the engine so that probe body 110 at least partially extends into the engine exhaust path. Elongate probe body 110 includes a hollow, cylindrical shaped member 114 having at least one opening 116 through a side wall 118. More specifically, and in the embodiment shown in Figure 3, three openings 116 extend through cylindrical shaped member side wall 118. Openings 116 are radially spaced about 120° apart from each adjacent opening 116. Openings 116 are not axially aligned so that exhaust cannot simply flow into one opening 116 and then out another opening 116 without any interference by probe 54. Of course, more than or fewer than three openings 116 can be utilized. Elongate probe body 110 further includes a cap 120 secured to and closing an open end 122 of cylindrical shaped member 114.

Engine engagement assembly 112 includes a threaded portion 124 sized to be threadedly engaged within opening 36, and a tube connection portion 126 sized to be inserted within tube 58. Tube connection portion 126 includes a head 128 to prevent unintended separation of probe 54 and tube 58. Tube 58 is secured to tube connection portion 126 by a locking ring 130. Assembly 112 also includes a sealing portion 132 which when probe 54 is fully tightened into opening 36, tightly fits against case 100. A hex portion 134 also is provided to facilitate securing probe 54 within opening 36 using a wrench or other mating tool.

Figure 4 is a cross-sectional view of probe 54 along Line 4-4 in Figure 3. As shown in Figure 4, probe 54 includes a pellet 136 located within cylindrical shaped member 114. In an exemplary embodiment, pellet 136 is sintered metal. Cylindrical shaped member 114 includes an inner diameter surface 138, and a ledge 140 is formed by inner diameter surface 138. Pellet 136 is trapped between ledge 140

and cap 120 secured to and closing open end 122 of cylindrical shaped member 114. Pellet 136, in the exemplary embodiment, is at least coextensive with the location of openings 116 so that carbon and soot that may flow into probe 54 via openings 116 come into contact with pellet 136. A flow passage 142 extends longitudinally through probe 54 so that exhaust gas pressure is communicated through probe 54 and into tube 58.

Figure 5 is an exploded view of probe 154. As clearly shown in Figure 5, probe 154 includes elongate probe body 110, engine engagement assembly 112, and cap 120. Elongate body 110 is press fit into engagement with engine engagement assembly 112. Specifically, a bore 144 extends through threaded portion 124, and bore 144 is sized to form a tight fit with elongate body 110. Pellet 136 is inserted into body 110, and cap 120 is sized to be fit over pellet 136 and within body 110. Cap 120 forms a tight fit with body 110. Elongate body 110, engagement assembly 112, and cap 120 are fabricated, for example, from stainless steel. Pellet 136 is, for example, sintered metal.

To assembly probe 54 to power head 100, elongate body 110 is inserted through opening 36 and threaded portion 124 threadedly engages the threads of opening 36. A wrench or other tool can be used to tighten probe 54 so that seal portion 132 tightly fits against case 100. Tube 58 is then pushed over tube portion 126 and locking ring 130 securely maintains tube 58 in tight fit with portion 126. Probe tip 146 extends into exhaust duct 106 so that tip 146 is located within a hot portion of the exhaust flow during engine operation.

During engine operation, the exhaust gas emitted from each cylinder and is transmitted through and along exhaust duct or path 106. Some exhaust flows into probe 54 through openings 116, and the large particle of carbon and soot, which are naturally found in such exhaust are substantially blocked by sintered metal pellet 136 from flowing towards tube 58. That is, pellet 136 functions as a filter to prevent oil, soot, and carbon from entering and blocking passage 142. Since tip 144 is located in the hot portion of the exhaust flow, such heat is transferred to pellet 136 and to the blocked soot and carbon. The temperature within probe 54 at pellet 136 can reach a sufficiently high temperature so that the soot and carbon burn in probe 54.

Referring to Figures 6, 7, and 8, Figure 6 is a right side view of diaphragm assembly 56, Figure 7 is a left side view of assembly 56, and Figure 8 is a cross sectional view along Line 8-8 shown in Figure 7. Diaphragm assembly 56

includes a diaphragm housing 150 and a diaphragm 152 positioned in housing 150 and separating a first chamber 154 and a second chamber 156. First chamber 154 is configured to be in flow communication with the exhaust path and second chamber 156 is configured to be in flow communication with the engine control unit.

5 Diaphragm housing 150 includes a first housing member 158 and a second housing member 160. Housing members 158 and 160 are fabricated using, for example, plastic molding processes. First housing member 158 has an inlet 162, and second housing member 160 has an outlet 164. An inner surface 166 of first housing member 158 also is a side wall of first chamber 154, and inner surface 166 has a
10 conical shape to facilitate drainage of water from first chamber 154. Also, first chamber 154 has a first volume and second chamber 156 has a second volume. The first volume is greater than the second volume.

Diaphragm 152 includes an o-ring 168 and a diaphragm member 170
15 integral with o-ring 168. O-ring 168 and diaphragm member 170 are fabricated, for example, from fluorosilicone. First and second housing members 158 and 160 each include an o-ring groove 172 and 174 so that when housing members 158 and 160 are assembled, diaphragm o-ring 168 is trapped between first and second housing members 158 and 160 in grooves 172 and 174. First and second housing members
20 158 and 160 are secured together by screws 176 which extend through openings in second housing member 160 and into threaded bosses 178 of first housing member 158.

Prior to operation of the engine, diaphragm assembly 56 is coupled to the engine so that first chamber 154 is in flow communication with the engine exhaust path and second chamber 156 is in flow communication with the engine control unit.
25 In one embodiment, first tube 58 extends from inlet 162 to probe 54, and second tube 62 extends from outlet 164 to the engine ECU. Tubes 58 and 62 are secured to inlet 162 and outlet 164 by locking rings 180.

Tube 62 may include a flow restrictor 182 to dampen pressure spikes transmitted through tube 62 to the engine ECU, resulting in the final pressure reading
30 at the ECU representing an averaged measure of the exhaust gas pressure. Restrictor 182 may, for example, be fabricated from brass and include a reduced size flow section 184 having a through hole with a diameter of about 20/1000 of an inch.

5 The air in second chamber 156 and tube 62 is trapped. That is, second
chamber 156 and tube 62 are sealed so that air does not escape therefrom. Limiting
the volume of trapped air is beneficial in that as such trapped air is heated and
expands, such expanding air acts on diaphragm 152. It would be undesirable for
diaphragm 152 to fully expand due to expansion of the trapped air since if diaphragm
152 fully expands into first chamber 154, it will no longer communicate an accurate
pressure change from the first chamber 154 to second chamber 156. By limiting the
volume of trapped air, the extent of the expansion of diaphragm 152 also is limited so
that even on extremely hot days, diaphragm 152 still efficiently transmits exhaust
10 pulses from first chamber 154 to second chamber 156.

15 During engine operation, changes in exhaust gas pressure are
communicated to diaphragm 152 via first tube 58. The change in exhaust pressure
causes diaphragm 152 to compress air in second chamber 154 and in second tube 62.
As a result, the pressure change is transmitted through second chamber 154, second
tube 62, and to the engine control unit. The engine control unit can use such exhaust
gas pressure data to control engine operations, such as to control the fuel / air ratio in
the engine cylinders.

20 The above described diaphragm facilitates communication of engine
exhaust pressure information to an engine control unit and protects the control unit
from direct exposure to the exhaust flow.

25 The above described diaphragm assembly 56 could be sold in kit form.
In an exemplary embodiment, the kit includes diaphragm assembly 56, and a tube for
connecting the diaphragm to the engine exhaust duct (e.g., directly or via a probe) and
to an engine ECU. Of course, locking rings also may be included in the kit for
securing the tube to the tube connector portions of the various components. The kit
may also include a probe for being at least partially inserted within the exhaust flow.

While the invention has been described in terms of various specific
embodiments, those skilled in the art will recognize that the invention can be practiced
with modification within the spirit and scope of the claims.

WHAT IS CLAIMED IS:

1. A diaphragm assembly for being connected between an engine exhaust path and an engine control unit, said diaphragm assembly comprising:

a diaphragm housing; and

a diaphragm positioned in said housing and separating a first chamber and a second chamber, said first chamber configured to be in flow communication with the engine exhaust path, and said second chamber configured to be in flow communication with the engine control unit.

2. A diaphragm assembly in accordance with Claim 1 wherein said diaphragm housing comprises a first housing member and a second housing member, said diaphragm between said first and second housing members.

3. A diaphragm assembly in accordance with Claim 2 wherein an inner surface of said first housing member also is a side wall of said first chamber, said inner surface having a conical shape to facilitate drainage of water from said first chamber.

4. A diaphragm assembly in accordance with Claim 1 wherein said first chamber comprises a first volume and said second chamber comprises a second volume, said first volume greater than said second volume.

5. A diaphragm assembly in accordance with Claim 1 wherein said diaphragm comprises an o-ring and a diaphragm member integral with said o-ring.

6. A diaphragm assembly in accordance with Claim 5 wherein said o-ring and said diaphragm member are fluorosilicone.

7. A diaphragm assembly in accordance with Claim 5 wherein said diaphragm housing comprises an o-ring groove for receiving said o-ring.

8. A diaphragm assembly in accordance with Claim 5 wherein said diaphragm housing comprises a first housing member and a second housing member, said first and second housing members each comprising an o-ring groove so that when said housing members are assembled, said diaphragm o-ring is trapped between said first and second housing members in said grooves.

9. An exhaust gas pressure sensing system for being connected between an engine exhaust path and an engine electronic control unit of a marine engine, said system comprising:

a probe for being secured to the marine engine and configured to extend into the engine exhaust path; and

a diaphragm assembly in flow communication with said probe and coupled between said probe and the engine electronic control unit.

10. An exhaust gas pressure sensing system in accordance with Claim 9 wherein said diaphragm assembly comprises:

a diaphragm housing; and

a diaphragm positioned in said housing and separating a first chamber and a second chamber, said first chamber configured to be in flow communication with the engine exhaust path, and said second chamber configured to be in flow communication with the engine control unit.

11. An exhaust gas pressure sensing system in accordance with Claim 10 wherein said diaphragm housing comprises a first housing member and a second housing member, said diaphragm between said first and second housing members.

12. An exhaust gas pressure sensing system in accordance with Claim 11 wherein an inner surface of said first housing member also is a side wall of said first chamber, said inner surface having a conical shape to facilitate drainage of water from said first chamber.

13. An exhaust gas pressure sensing system in accordance with Claim 10 wherein said first chamber comprises a first volume and said second chamber comprises a second volume, said first volume greater than said second volume.

14. An exhaust gas pressure sensing system in accordance with Claim 10 wherein said diaphragm comprises an o-ring and a diaphragm member integral with said o-ring.

15. An exhaust gas pressure sensing system in accordance with Claim 9 wherein said probe comprises an elongate probe body, and an engine engagement assembly secured to said probe body and configured to engage to the engine so that said probe body at least partially extends into the engine exhaust path.

5 16. An exhaust gas pressure sensing system in accordance with Claim 15 wherein said elongate probe body comprises a hollow, cylindrical shaped member having at least one opening through a side wall of said cylindrical shaped member.

10 17. An exhaust gas pressure sensing system in accordance with Claim 16 wherein three openings extend through said cylindrical shaped member side wall, said openings being radially spaced about 120° apart from each adjacent opening.

15 18. An exhaust gas pressure sensing system in accordance with Claim 15 wherein said elongate probe body further comprises a cap secured to and closing an open end of said cylindrical shaped member.

19. An exhaust gas pressure sensing system in accordance with Claim 15 further comprising a pellet located within said cylindrical shaped member.

20 20. An exhaust gas pressure sensing system in accordance with Claim 15 wherein said engine engagement assembly comprises a threaded portion sized to be threadedly engaged within an opening in flow communication with the engine exhaust path, and a tube connection portion sized to be inserted within a tube.

~~21.~~ A method for securing a diaphragm assembly to an engine, said method comprising the steps of:

25 coupling an inlet of the diaphragm assembly in flow communication with an exhaust path of the engine; and

coupling an outlet of the diaphragm assembly to an electronic control unit of the engine.

30 22. A method in accordance with Claim 21 wherein coupling an inlet of the diaphragm assembly in flow communication with an exhaust path of the engine comprises the steps of:

at least partially inserting a probe through an opening in the engine;

securing the probe in place so that at least a portion of the probe extends into an exhaust path of the engine;

5 engaging one end of a tube to the probe so that during engine operation, exhaust pulses sensed by the probe are transmitted through the probe to the tube; and

engaging a second of the tube to the inlet of the diaphragm assembly.

10 23. A method in accordance with Claim 22 wherein securing the probe in place comprises the step of threadedly engaging the probe within an opening in the engine.

0969967, 04600
24. Apparatus for sensing changes in exhaust gas pressure during engine operation, said apparatus comprising diaphragm means configured to be coupled between an exhaust path of the engine and an engine control unit and for transmitting exhaust pulses to the control unit.

15 25. Apparatus in accordance with Claim 24 wherein said diaphragm means comprises a diaphragm housing, and a diaphragm positioned in said housing and separating a first chamber and a second chamber, said first chamber configured to be in flow communication with the engine exhaust path, and said second chamber configured to be in flow communication with the engine control unit.

20 26. Apparatus in accordance with Claim 25 wherein said diaphragm housing comprises a first housing member and a second housing member, said diaphragm between said first and second housing members.

25 27. Apparatus in accordance with Claim 25 wherein an inner surface of said first housing member also is a side wall of said first chamber, said inner surface having a conical shape to facilitate drainage of water from said first chamber.

28. Apparatus in accordance with Claim 24 further comprising probe means for sensing exhaust gas pressure during engine operation, and engagement means secured to said probe means for securing said probe so that said

probe at least partially extends within an exhaust path of the engine during engine operation.

29. Apparatus in accordance with Claim 28 wherein said probe means comprises an elongate probe body comprising a hollow, cylindrical shaped member.

30. Apparatus in accordance with Claim 29 wherein said cylindrical shaped member comprises at least one opening through a side wall of said cylindrical shaped member.

31. Apparatus in accordance with Claim 30 wherein three openings extend through said cylindrical shaped member side wall, said openings being radially spaced about 120° apart from each adjacent opening.

32. Apparatus in accordance with Claim 29 wherein said elongate probe body further comprises a cap secured to and closing an open end of said cylindrical shaped member.

33. Apparatus in accordance with Claim 28 further comprising a pellet located within said probe means.

34. Apparatus in accordance with Claim 33 wherein said pellet comprises sintered metal.

35. Apparatus in accordance with Claim 28 wherein said engagement means comprises an engine engagement assembly secured to said probe means and configured to engage to the engine so that said probe means at least partially extends into the engine exhaust path.

36. Apparatus in accordance with Claim 35 wherein said engine engagement assembly comprises a threaded portion sized to be threadedly engaged within an opening in flow communication with the engine exhaust path.

~~37.~~ A engine comprising:

a powerhead;

an exhaust housing extending from said power head;

a lower unit extending from said exhaust housing;

an exhaust path extending from said power head and through said exhaust housing and said lower unit; and

a diaphragm assembly in flow communication with said exhaust path and coupled to an engine control unit.

38. An engine in accordance with Claim 37 wherein said diaphragm comprises a diaphragm housing, and a diaphragm positioned in said housing and separating a first chamber and a second chamber, said first chamber configured to be in flow communication with the engine exhaust path, and said second chamber configured to be in flow communication with the engine control unit.

39. An engine in accordance with Claim 38 wherein said diaphragm housing comprises a first housing member and a second housing member, said diaphragm between said first and second housing members.

40. An engine in accordance with Claim 39 wherein an inner surface of said first housing member also is a side wall of said first chamber, said inner surface having a conical shape to facilitate drainage of water from said first chamber.

41. An engine in accordance with Claim 38 wherein said diaphragm comprises an o-ring and a diaphragm member integral with said o-ring.

42. An engine in accordance with Claim 37 further comprising a probe comprising an elongate probe body, and an engine engagement assembly secured to said probe body and engaged relative to said exhaust path so that said probe body at least partially extends into said engine exhaust path.

43. An engine in accordance with Claim 42 wherein said elongate probe body comprises a hollow, cylindrical shaped member comprising a side wall and at least one opening through said side wall.

44. An engine in accordance with Claim 43 wherein three openings extend through said cylindrical shaped member side wall, said openings being radially spaced about 120° apart from each adjacent opening.

45. An engine in accordance with Claim 43 wherein said elongate probe body further comprises a cap secured to and closing an open end of said cylindrical shaped member.

46. An engine in accordance with Claim 43 further comprising a pellet located within said cylindrical shaped member.

47. A kit for a marine engine, comprising a diaphragm assembly comprising a diaphragm housing, and a diaphragm positioned in said housing and separating a first chamber and a second chamber, said first chamber configured to be in flow communication with an engine control unit, and said second chamber configured to be in flow communication with an engine exhaust path.

48. A kit in accordance with Claim 47 wherein said diaphragm housing comprises a first housing member and a second housing member, said diaphragm between said first and second housing members.

49. A kit in accordance with Claim 48 wherein an inner surface of said first housing member also is a side wall of said first chamber, said inner surface having a conical shape to facilitate drainage of water from said first chamber.

50. A kit in accordance with Claim 47 wherein said first chamber comprises a first volume and said second chamber comprises a second volume, said first volume greater than said second volume.

51. A kit in accordance with Claim 47 wherein said diaphragm comprises an o-ring and a diaphragm member integral with said o-ring.

52. A kit in accordance with Claim 47 further comprising a probe for being secured to the marine engine, said probe comprising an elongate probe body, and an engine engagement assembly secured to said probe body and configured to engage to the engine so that said probe body at least partially extends into the engine exhaust path.

53. A kit in accordance with Claim 52 wherein said elongate probe body comprises a hollow, cylindrical shaped member comprising at least one opening through a side wall of said cylindrical shaped member.

54. A kit in accordance with Claim 53 wherein three openings extend through said cylindrical shaped member side wall, said openings being radially spaced about 120° apart from each adjacent opening.

5 55. A kit in accordance with Claim 52 wherein said elongate probe body further comprises a cap secured to and closing an open end of said cylindrical shaped member.

56. A kit in accordance with Claim 52 further comprising a pellet located within said probe body.

10 57. A kit in accordance with Claim 56 wherein said pellet comprises sintered metal.

009240 2996560

EXHAUST DIAPHRAGM ASSEMBLY

ABSTRACT OF THE DISCLOSURE

The present invention, in one aspect, includes a diaphragm assembly for being connected between an engine exhaust path and an engine electronic control unit to transmit changes in exhaust gas pressure from the exhaust path to the control unit. In an exemplary embodiment, the diaphragm assembly includes a diaphragm housing and a diaphragm positioned in the housing and separating a first chamber and a second chamber. The first chamber is configured to be in flow communication with the exhaust path and the second chamber is configured to be in flow communication with the engine control unit. The diaphragm housing, in the exemplary embodiment, includes a first housing member and a second housing member. An inner surface of the first housing member also is a side wall of the first chamber, and the inner surface has a conical shape to facilitate drainage of water from the first chamber. Also, the first chamber has a first volume and said second chamber has a second volume. The first volume is greater than the second volume. The diaphragm includes an o-ring and a diaphragm member integral with the o-ring. In the exemplary embodiment, the o-ring and said diaphragm member are fabricated from fluorosilicone. The first and second housing members each include an o-ring groove so that when the housing members are assembled, the diaphragm o-ring is trapped between the first and second housing members in the grooves.

FIG. 2

0959667-042600

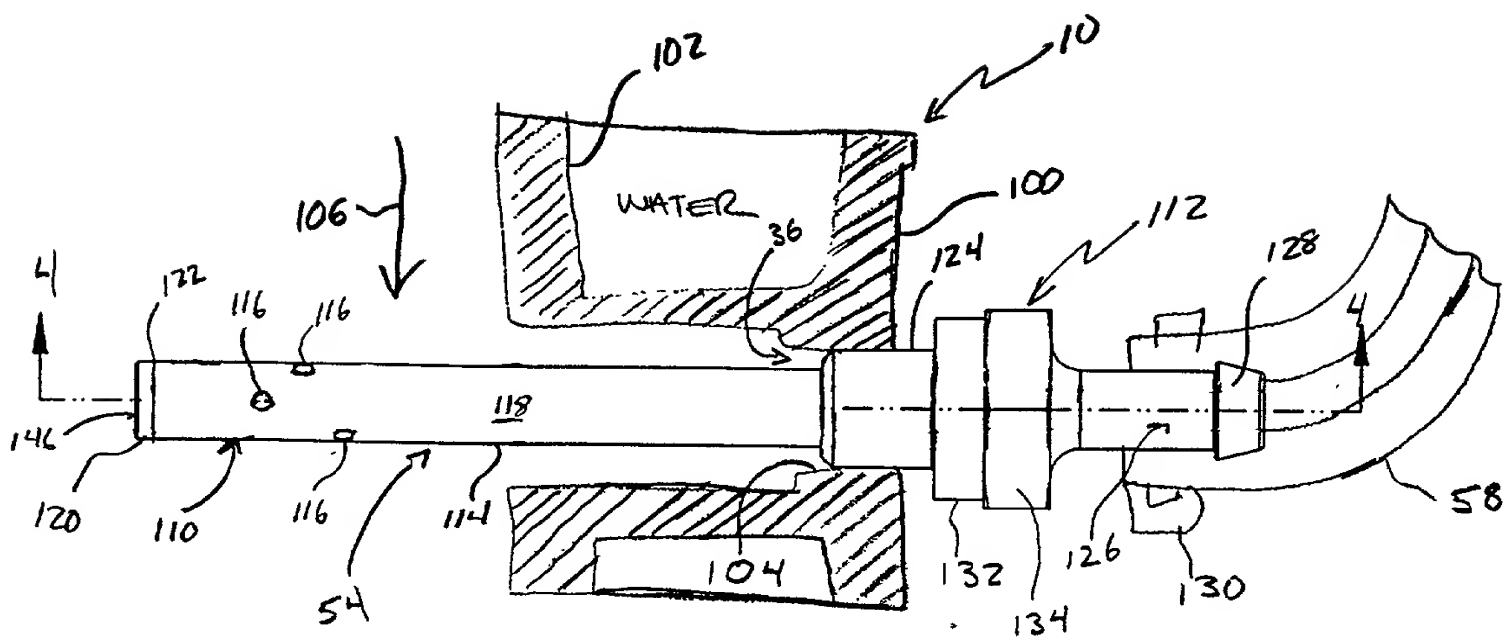


FIG. 3

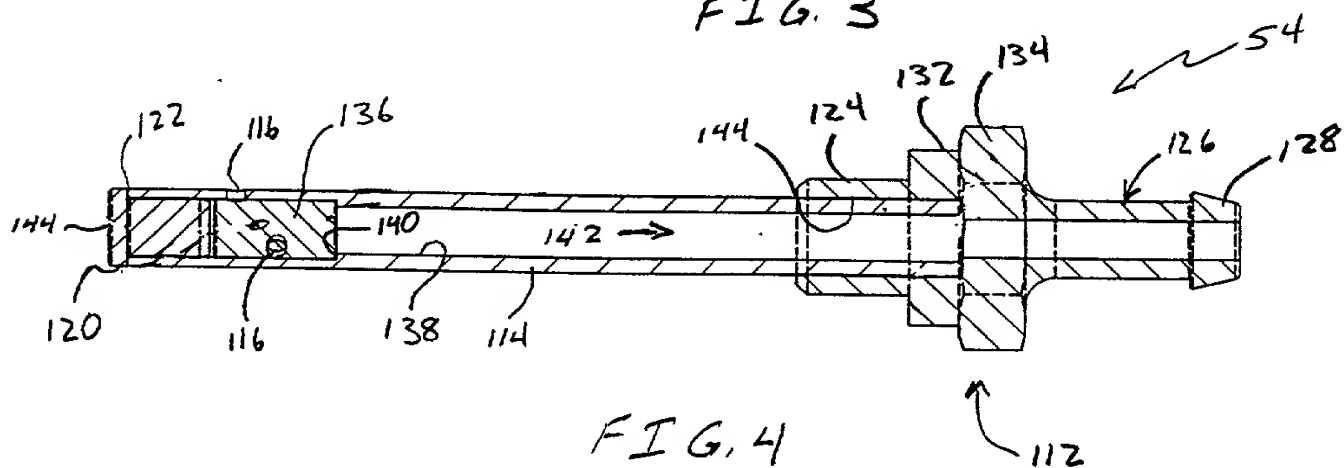


FIG. 4




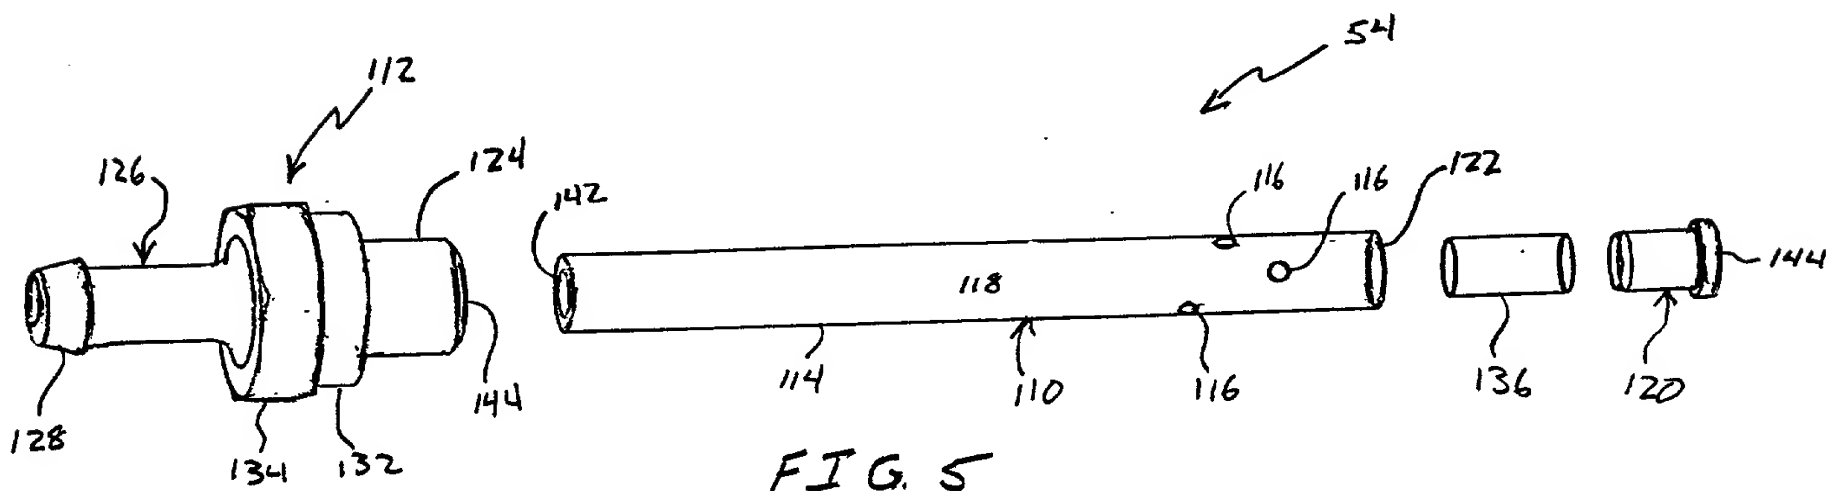


FIG. 5

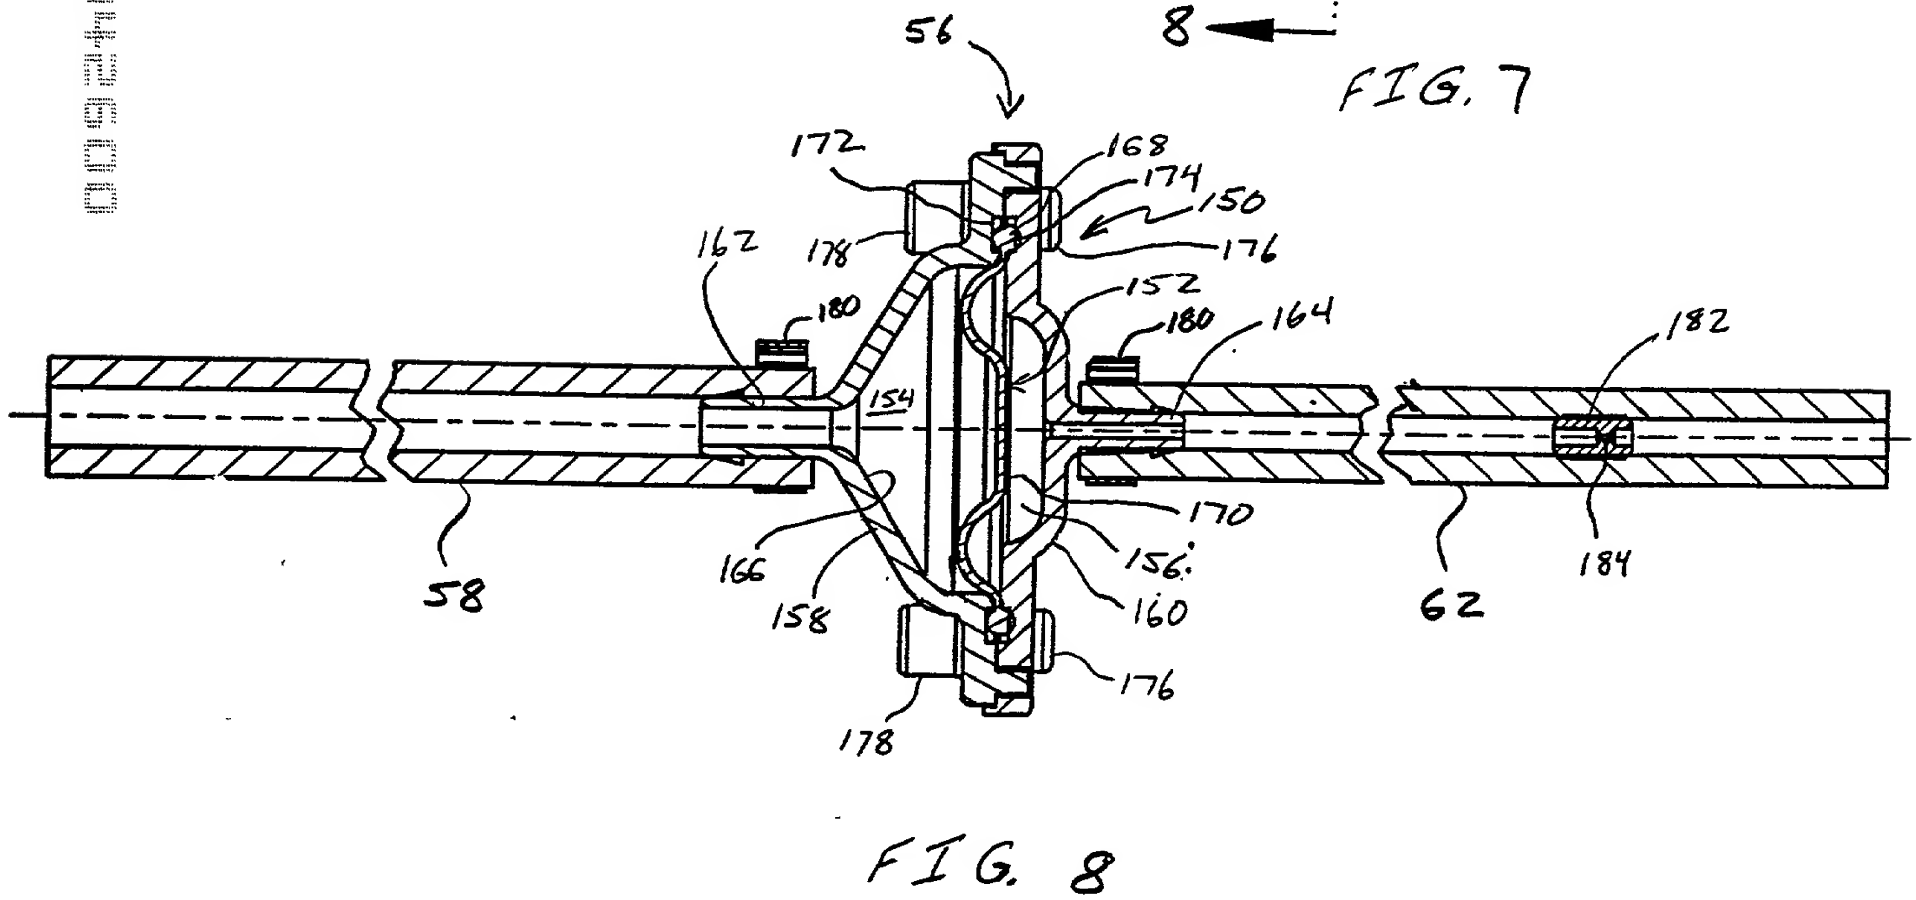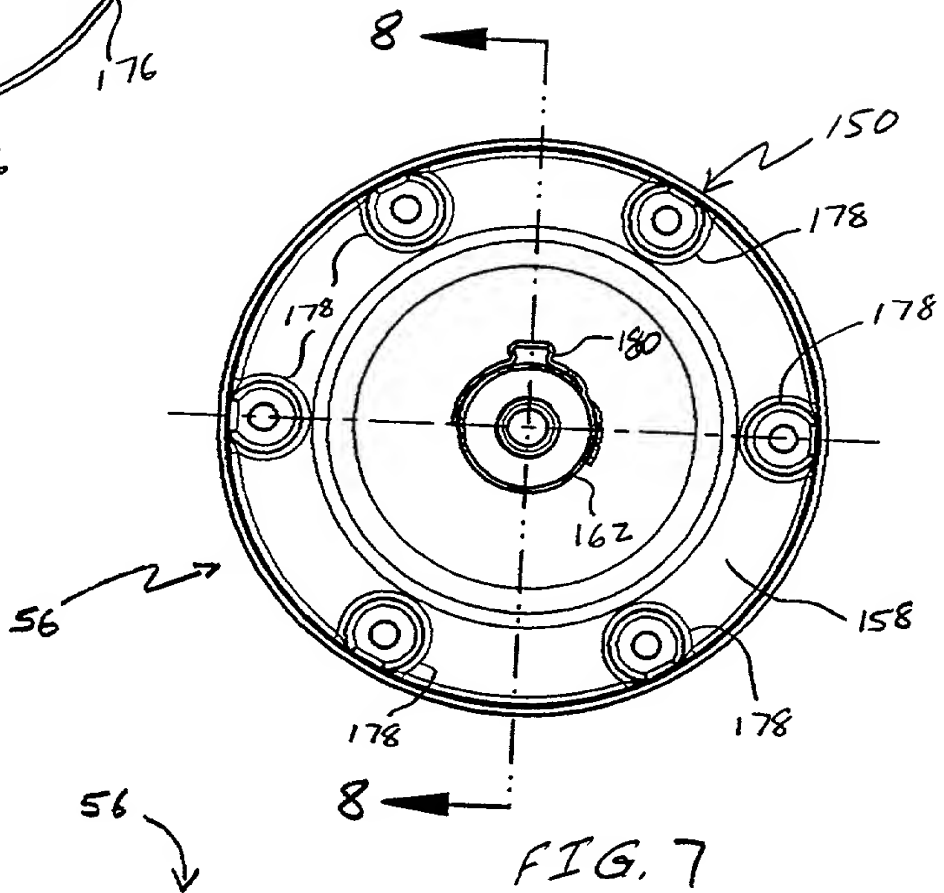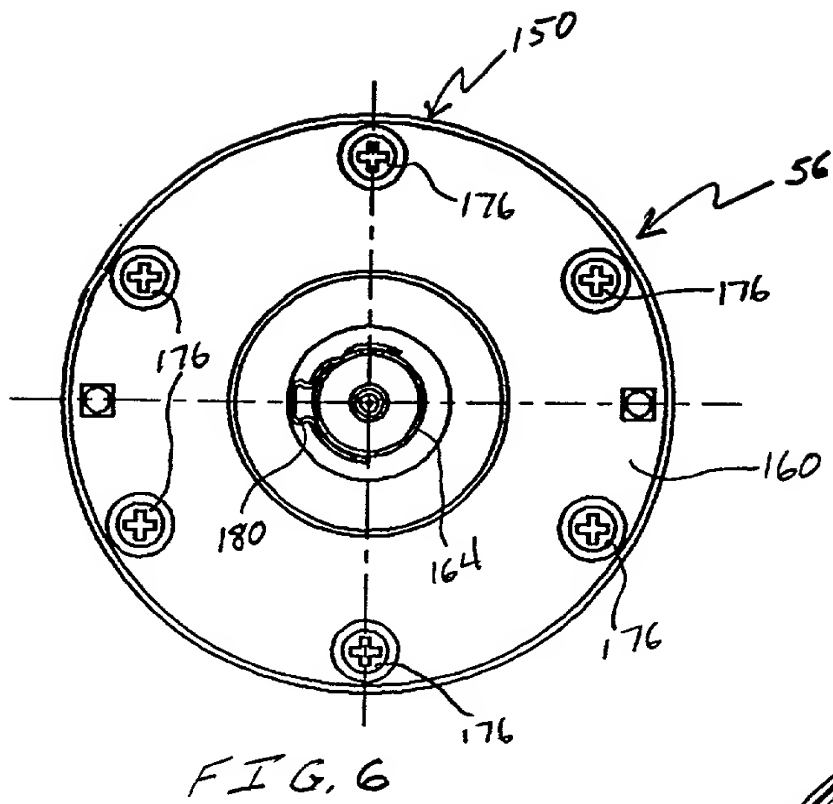

| | |
|-----------------------------------|-------------------------------------|
| DECLARATION AND POWER OF ATTORNEY | Attorney's Docket No. EN-3093-US |
|-----------------------------------|-------------------------------------|

As a below named inventor, I hereby declare that:
My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **EXHAUST DIAPHRAGM ASSEMBLY**, the specification of which:

(check one) ☒ is attached hereto
☐ was filed on _____ as Application Serial No. _____,
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.
I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

I hereby claim priority benefits under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

| Application Serial No. | Filing Date | Status (patented, pending, abandoned) |
|------------------------|-------------|---------------------------------------|
| _____ | _____ | _____ |
| _____ | _____ | _____ |

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below:

| Application Serial No | Filing Date | Additional provisional application numbers are listed on a supplemental priority sheet attached hereto. |
|-----------------------|-------------|---|
| _____ | _____ | |
| _____ | _____ | |

| | |
|--|---|
| POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number) John S. Beulick (Reg. No. 33,338), Patrick W. Rasche (Reg. No. 37,916), Michael Tersillo (Reg. No. 42,180), Tara A. Nealey (Reg. No. 42,927), Bruce T. Atkins, (Reg. No. 43,476), Alan L. Cassel (Reg. No. 35,842), Stephen R. Cooper (Reg. No. 42,437), Elizabeth D. Odell (Reg. No. 39,532), Robert B. Reeser, III (Reg. No. 45,548), Robert E. Slenker (Reg. No. 45,112), and Natu J. Patel (Reg. No. 39,559) of Armstrong Teasdale LLP, One Metropolitan Square, Suite 2600, St. Louis, MO 63102-2740; and John H. Pilarski (Reg. No. 33,038) of Outboard Marine Corporation, 100 Sea Horse Drive, Waukegan, IL 60085. | |
| Send Correspondence to: John S. Beulick Armstrong Teasdale LLP One Metropolitan Square, Suite 2600 St. Louis, MO 63102-2740 | Direct Telephone Calls To: John S. Beulick 314/621-5070 |

DECLARATION AND POWER OF ATTORNEY

Attorney's Docket No.

EN-3093-US

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application and any patent issued thereon.

SOLE OR FIRST INVENTOR:

Full Name: Patrick C. TetzlaffSignature: Date: 4-25-2000Residence: Franklin, WICitizenship: United StatesPost Office Address: 6361 S. 27th St., Lot #40, Franklin, WI 53132

SECOND JOINT INVENTOR, IF ANY:

Full Name: James E. MacierSignature: Date: APRIL 25, 2000Residence: Beach Park, ILCitizenship: United StatesPost Office Address: 40020 N. Adelphi, Beach Park, IL 60099

THIRD JOINT INVENTOR, IF ANY:

Full Name: Jonathan J. ServaisSignature: Date: APRIL 25, 2000Residence: Kenosha, WICitizenship: United StatesPost Office Address: 1821 33rd St., Kenosha, WI 53140

009940 2985560